



ISUZU CITIPOINT 12 HYPER

Manufactured by Anadolu Isuzu
The one and only "Isuzu Manufacturing Management (IMM)" certified Isuzu factory in Europe.

ISUZU CITIPORT 12 HYPER

TECHNICAL SPECIFICATIONS

Dimensions (mm)

Maximum Length	12030
Maximum Width	2550
Maximum Height	3136 (w A/C)
Wheelbase	5850
Front Overhang	2700
Rear Overhang	3480

Weights (kg)

Gross Vehicle Weight	18700
----------------------	-------

Engine

Model	Cummins L9E6E340B
Type	Commonrail Turbo Diesel Intercooler
Number of Cylinders	6
Displacement (cc)	8900
Maximum Power (kw(PS)/rpm)	247 (335) / 2100
Maximum Torque (Nm/rpm)	1485 / 1200
Emission Standard	Euro VI OBD-E

Transmission

Model	VOITH DIWA 6
Number of Gears	4 Forward, 1 Reverse

Steering System

	Hydraulic and Adjustable Dashboard and Steering Wheel Column in Height and Inclination
--	--

Tyres

Tyre Sizes	275/70 R22,5
------------	--------------

Suspension

Front	Independent Air Suspension, 2 Air Bellows, 2 Hydraulic Shock Absorbers
Rear	Air Suspension - 4 Air Bellows, 4 Hydraulic Shock Absorbers
Anti Roll Bar	S
Kneeling System (ECAS & ELC)	S

Brake System

Front / Rear System	Disc / Disc Full air brake system with EBS (Automatic Oil, Water Separator System Is Optional) Air Actuated Acted on Rear Axle Intarder (Retarder is Integrated to Transmission)
Parking Brake	
Auxiliary Brake	

Fuel Tank


Fuel Tank Capacity (lt)	300
Adblue Tank (lt)	43

Electrical System

Battery	24V (2x12V) - 240 Ah
---------	----------------------

Passenger Capacity*

Maximum Passenger Capacity	107
Max. Passenger Capacity Layout	27 Seated (3 Foldable Seats) +80 Standing (3 Doors)
Standard Layout	36 Seated (4 Foldable Seats) +69 Standing (2 Doors)
Layout with Wheelchair	32 Seated + 1 Wheelchair + 67 Standing (2 Doors) 24 Seated + 1 Wheelchair + 79 Standing (3 Doors)

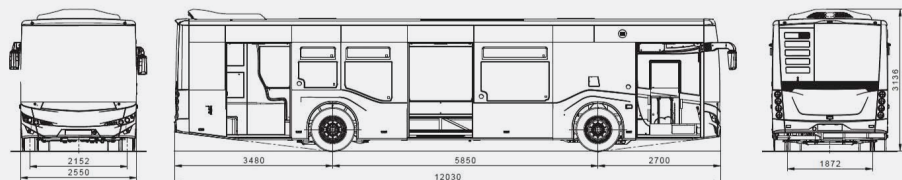

EQUIPMENTS

Heating and Ventilation

Pre Heater	Opt
Fan Heater	S (Front and Middle)

Air Conditioner

Digital Air Conditioner	S
A/C Dashboard Nozzle Diffuser for Driver	S
A/C With Heater	S

Safety & Driving Comfort

Speed Limitor	S
Tachograph	S
Multiplex System	S
ABS	S
ASR	S
EBS	S
EBD	S
Bus Stop Brake (BSB)	S
Hillholder	S
Retarder	S
Parking Sensor	S
Spare Wheel	S
Tyre Inflation Set	S
Roof Hatch for Ventilation & Emergency Exit	S (2 Units with Electrical Control)
Reverse Gear Warning Beeper	S
Fire Extinguisher	S
Engine Compartment Fire Detection and Automatic Fire Supression System	S
Fog Lamps	S (Front / Rear)
Day Time Running Lamps (DRL)	S
Locking System	S (0: Square Lock)
Battery Main Switch	S

Exterior

Metallic Paint	Opt
Side Stripe Stickers	Opt
Towing Device	S (Front)

Doors

Number of Service Doors	3 Doors (S), 2 Doors (Opt)
Type of Service Doors	Double Wing Air Actuated Interior Movement For All Front And Middle Doors Manual with Sensor S (Front Service Door)
Wheelchair Ramp	
Remote Control	

Windows

Passenger Windows	Non-Sliding, 1/4 Hinged Passenger Windows, Single Glazed (S) With Slider, Double Glazed (Opt) Double Glazed (S) Sliding, Double Glazed (S) Windshield Blind (S), Driver Curtain (S)
Front Door Window	
Driver's Window	
Blind	

Interior

Driver Seat

Driver's Seat	Air Actuated, Adjustable
Electrically Controlled and Heated Side Mirrors	S
Driver's Cabin	Semi Glass (S), Full Glass (Opt)
Ticket Box Brackets	S
USB Charger for Driver	S

Passenger Compartment

Backrest (for Standing Passengers)	S
USB Charger for Passangers	S

Lightening & Signalization

Interior Ceiling Lighting	S (Continuous Type With LED)
Digital Destination Display	Slither Route Display (S), Rear Route Indicator Panel (S), Colored Front Route Indicator Panel (Opt)

Audio & Visual

Radio System	Radio, USB, MP3
Monitor / LCD Screen (Passenger Compartment)	S
Digital Clock	S
Wifi (Internet) Router	S

S: Standard Opt: Optional

* Different seating variations are available.